





The R15 pump hoist is designed for fast and easy setup by means of a self supporting mast with two 4-1/2" bore hydraulic cylinders. A guy cable system is not needed in most situations.

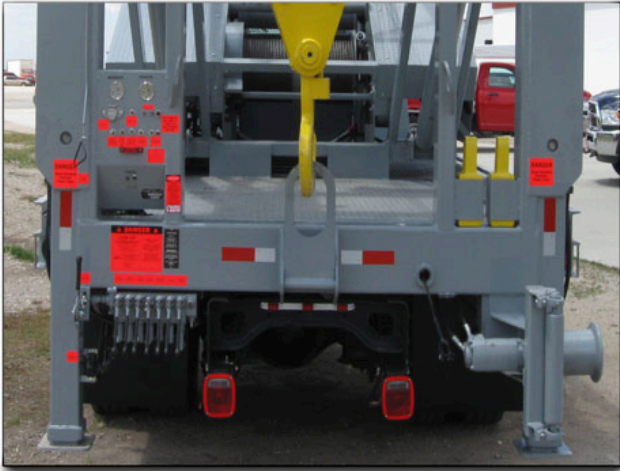

Controls are conveniently located at the left rear corner of the machine in close proximity to the work area.

The front portion of the deck and the area within the frame remains completely open for cargo.

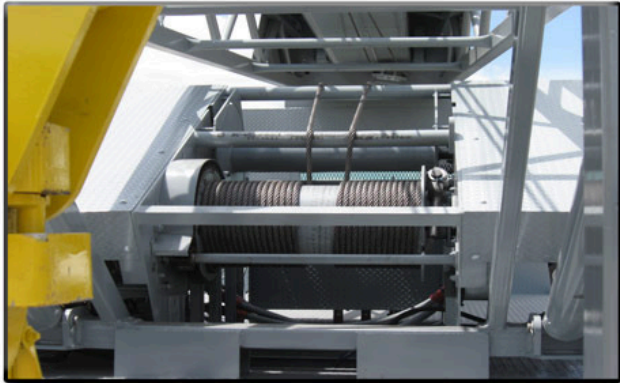

The winch frame is mounted at an angle to allow the rig operator to visually see both winch drums from ground level while running the pump hoist. Both the mainline and sandline have a fail-safe brake system. This photo shows how we "double wrap" the cable to double the line speed.

#### Standard specifications

Standard mast height: 44ft  
 Standard layback: 10ft  
 Capacity with 4-part line: 44,000 lbs.  
 Mainline speed: 30ft per minute  
 Tailout capacity: 3,000 lbs.  
 Tailout speed: 100 ft per minute

#### Standard features

Ring and pition driven main winch  
 Failsafe brake system  
 Direct mounted PTO and pump  
 Tailout winch  
 Rear outriggers with holding valve  
 Holding valve on mast cylinders  
 Line block with hook  
 Gray paint on Mast / Black on deck

#### Optional features

Sandline winch  
 Oil cooler  
 Cathead  
 Breakout wrench  
 Front hydraulic jacks  
 Custom paint color  
 Electronic walking beam  
 Remote control  
 Tool boxes  
 Work lights  
 Other options available upon request



#### Hunke Manufacturing LLC

PO Box 128 • Snyder, NE 68664

Phone: 402-568-2221 • Fax: 402-568-2223

E-mail: sales@hunkemfg.com • Website: www.hunkemfg.com