




The R20 is a carbon copy of the R12. The R20 winch motors are hydrostatically driven. The hoist is designed for fast and easy setup by means of a self supporting mast with two 4-1/2" bore hydraulic cylinders. A guy cable system is not needed in most situations.

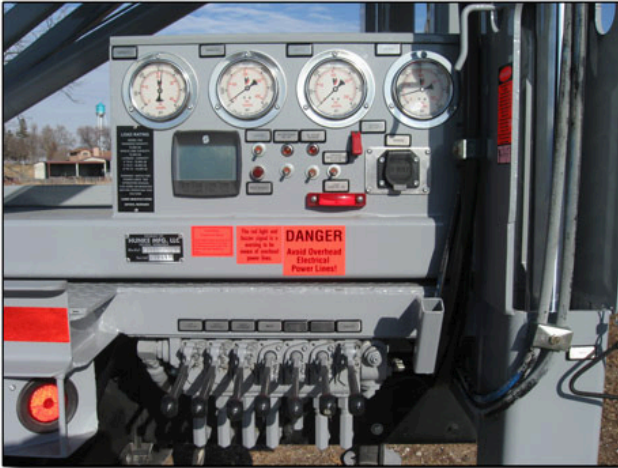

Controls are conveniently located at the left rear corner of the machine in close proximity to the work area.

The front portion of the deck remains completely open for cargo.



Both the mainline and optional sandline use motors that are hydrostatically driven with infinite variable speed control for exceptionally smooth operation. These motors include an internal braking system. The winches are mounted at an angle to allow the rig operator to visually see both winches from ground level.

Standard specifications

Standard mast height: 44 ft.
 Standard layback: 10 ft.
 Capacity with 4-part line: 44,000 lbs.
 Sandline capacity: 13,000 lbs.
 Mainline speed: 75 ft./min
 Sandline speed: 300 ft./min
 Tailout capacity: 3,000 lbs.
 Tailout speed: 100 ft./min.

Standard features

Internal failsafe brake
 Oil cooler
 Tailout winch
 Rear outriggers with holding valve
 Holding valve on mast cylinders
 Line block with hook
 Controls on left rear corner
 Gray paint on Mast / Black on deck

Optional features

Sandline winch
 Cathead
 Breakout wrench
 Front hydraulic outriggers
 Custom paint color
 Electronic walking beam
 Tailgate
 Tool boxes
 Work lights
 Other options available upon request



Hunke Manufacturing LLC

PO Box 128 • Snyder, NE 68664

Phone: 402-568-2221 • Fax: 402-568-2223

E-mail: sales@hunkemfg.com • Website: www.hunkemfg.com