




The R36 is our second largest pulling rig (72,000 lbs). The hoist is designed for fast and easy setup by means of a self supporting mast with two 5" bore hydraulic cylinders. A guy cable system is not needed in most situations.

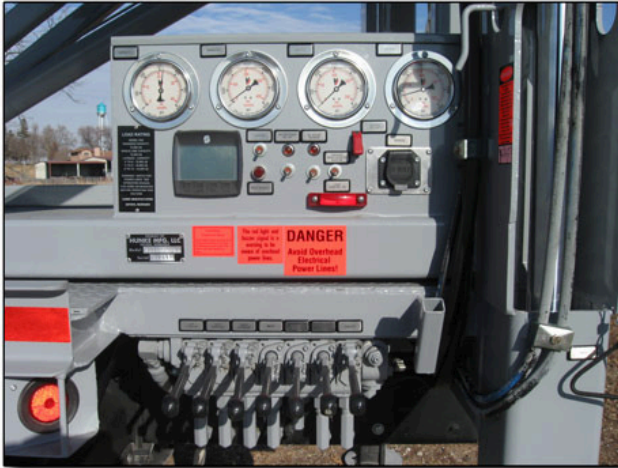

Controls are conveniently located at the left rear corner of the machine in close proximity to the work area.

The front portion of the deck remains completely open for cargo.



Both the mainline and optional sandline use motors that are hydrostatically driven with infinite variable speed control for exceptionally smooth operation. These motors include an internal braking system.

Standard specifications

Standard mast height: 44 ft.
Standard layback: 6 ft.
Capacity with 6-part line: 72,000 lbs.
Sandline capacity: 13,000 lbs.
Mainline speed: 50 ft./min
Sandline speed: 300 ft./min
Tailout capacity: 3,000 lbs.
Tailout speed: 100 ft./min.

Standard features

Internal failsafe brake
Oil cooler
Tailout winch
Rear outriggers with holding valve
Holding valve on mast cylinders
Line block with hook
Controls on left rear corner
Gray paint on Mast / Black on deck

Optional features

Sandline winch
Cathead
Breakout wrench
Front hydraulic outriggers
Custom paint color
Electronic walking beam
Tailgate
Tool boxes
Mast lights
Other options available upon request



Hunke Manufacturing LLC

PO Box 128 • Snyder, NE 68664

Phone: 402-568-2221 • Fax: 402-568-2223

E-mail: sales@hunkemfg.com • Website: www.hunkemfg.com