

Hoist Model	Main winch single line pull rating - lbs.	Max line part	Max capacity - lbs.	Single line speed fpm	Standard layback ft.	Sandline bare cap. lbs.	Sandline speed fpm	Sandline spool cap. 5/16"	Strid mast height ft.	Main winch location	* Est. shipping weight hoist unit only - lbs.
R2	1,000	2	2,000	140	6	NA	NA	NA	30	Mast	1,200
3T/4T	2,000	2	4,000	210	10	1,000	325	1,000	36	Mast	2,300
5T	3,000	4	12,000	120	10	1,000	**260/520	1,000	36	Frame	2,800
6T	6,000	2	12,000	140	10	2,300	**260/520	1,000	36	Frame	3,200
6.5T	7,000	2	13,000	150	15	2,300	**260/520	1,000	36	Mast	3,500
* Based on average package											
							**2-speed				

Model R2



Model 6T



Model 5T




Model R2




PIPE RACK

1 1/4 inch pipe - Qty. 41



R2 PIPE RACK

1 1/4 inch pipe - Qty. 24



Model 3/4 T



Model 5T

Numerous configurations available



Model 3-4T




Easy to operate control panels



Easy accessible pipe racks



Numerous options available

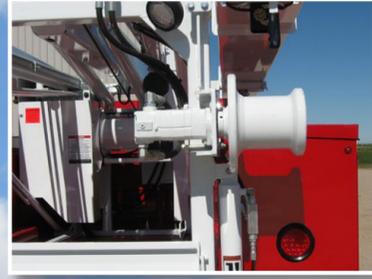

Model 6T

